

BY:




UltraFlex Series

Benefits of High Pressure:

- ✓ Improved Chip Management
- ✓ Increased Speeds & Feeds
 - Up to 10 Times Faster
- ✓ Increased Tool Life
 - Up to 15 Times Longer
- ✓ Superior Filtration to Increase Coolant Life
- ✓ Improved Part Finishes



Modular Design

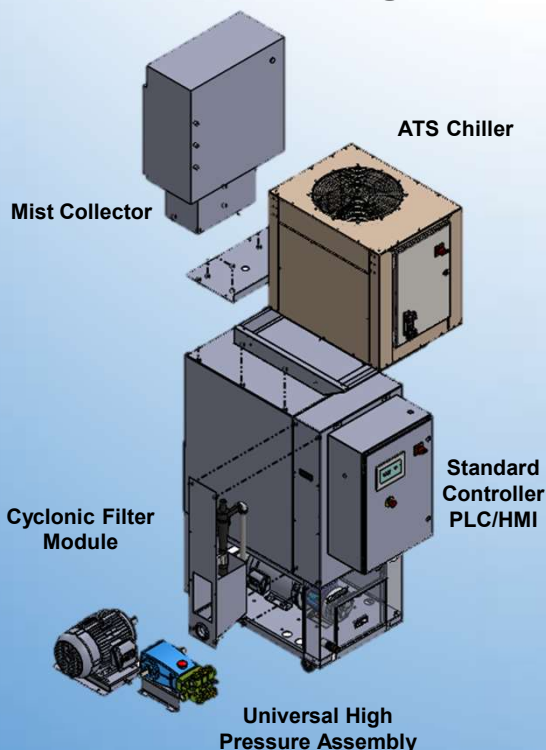

Available UltraFlex Models

Volume	Pressure	Flow	Filtration	Base Model
8gpm/30lpm	1000psi/70bar	Fixed	10um Bag	70-36
		Variable	Cyclonic	
15gpm/60lpm	1000psi/70bar	Fixed	10um Bag	70-60
		Variable	10um Bag	
20gpm/75lpm	750psi/55bar	Fixed	10um Bag	55-75
		Variable	10um Bag	
4gpm/15lpm	2000psi/140bar	Fixed	10um Bag	140-15
		Variable	Cyclonic	
20gpm/75lpm	300psi/20bar	Fixed	10um Bag	20-75

Dimac

69-71 Williams Rd, Dandenong
South VIC 3175, Australia

P: 03 9771 6121 www.dimac.com.au E: Sales@dimac.com.au

Standard Features:

- Unit Volumes: 4-20 gpm (15-75 lpm)
- Unit Pressures: 300-200 psi (20-140 bar)
- 60gal / 230L Clean Tank
- Full Color HMI Display
- UL/CSA/CE Cabinet Standards
- 10um Quad Bag Filtration
- Two High Pressure Outlets
- Quick Disconnect Low Pressure Hose Kits
- Unit Footprint:
W-24"x L-51"x H - 60" / W – 610 x L- 1295 x H-1594
- Unit Castor Package
- On Board Grundfos Feeder Pump
- Wiring Harnesses with Machine Side Connectors
- Unit Power to Specification – 230v / 460v / 400v
- Arc Flash Compliant

Integrated Unit Options:

- Unit Mounted and Integrated 36,000 btu Chiller
- Unit Mounted and Integrated 850 cfm Mist/Smoke Collector
- Cyclonic Media Free Filtration – (70-36) & (140-15) models
 - Water Soluble Coolant Only
- Up to 4 M-Code Programmable Pre-Set Pressures
- Infinite HMI Manual Programmable Pressure Settings

Ask your ATS Representative about our other product lines –

Work Holding



Air Chucks



InoFlex



Ultimate Chuck

Automation



Barfeeds



Xcelerate



Cylinders



Collet Chucks



Steadyrests



Toolchange



Rotary Table Units

UltraFlex Configurations

Base Model & Chiller



Base Model & Mist Collector



Base Model with Chiller & Mist Collector

